A Better Camera Mate

Q7 pro, matches with world-famous 4K/FHD camera brands, to assist cameraman in better photography experience.

Adjustable Color Space

Native, SMPTE-C, Rec. 709 and EBU are optional for color space.

Accurate Color Calibration

★ A specific calibration to reproduce the colors of the image color space.
★ Color calibration supports the PROLTE version of LightSpace CMS by Light Illusion.

HDR

When HDR is activated, the display reproduces a greater dynamic range of luminosity, allowing lighter and darker details to be displayed more clearly. Effectively enhancing the overall picture quality.

Without HDR

Inaccurate exposure, reduced image detail, unsatisfactory viewing experience.

With HDR

Enjoy sharper images, greater detail and richer colors.
ST-2084 300/1000/10000 are for optional.

Gamma

Select the appropriate gamma mode among of 1.8, 2.0, 2.2, 2.35, 2.4, 2.6 and 2.8.
Note: The Gamma menu becomes activated when the HDR is set to Off.
The Gamma menu becomes deactivated when the color space is set to Native.

3D LUT

Wider color gamut range to make precise color reproduction of Rec. 709 color space with built-in 3D LUT, featuring 8 default logs and 6 user logs.

8 DEFAULT LOGS

- SLog3ToLC-709
- SLog3ToLC-709TA
- SLog3ToSLog2-709
- SLog3ToCine+709
- SLog3ToLC-709
- SLog3ToLC-709TA
- SLog3ToC-709
- SLog3ToCine+709

3D LUT LOAD

Supports loading the .cube file via USB flash disk.

SDI and HDMI cross conversion

The HDMI output connector can actively transmit an HDMI input signal or output an HDMI signal that has been converted from an SDI signal. In short, signal transmits from SDI input to HDMI output and from HDMI input to SDI output.

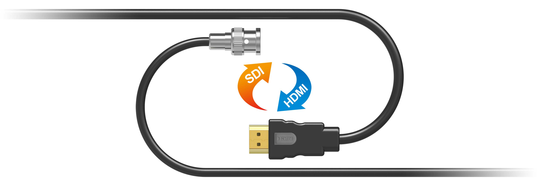



FULL-SCREEN WAVEFORM

GENERAL INFO. DISPLAY

PEAKING FILTER

Camera Auxiliary Functions

Q7 pro provides plenty of auxiliary functions for taking photos and making movies, such as peaking, false color and audio level meter.

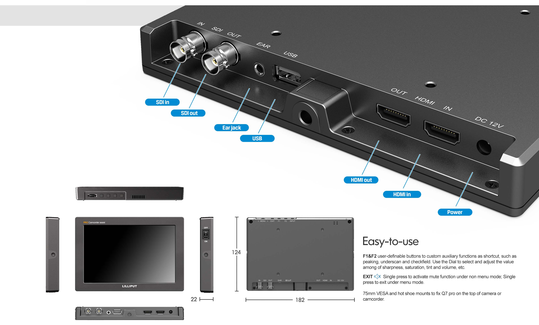

Easy-to-use

F1&F2 user-definable buttons to custom auxiliary functions as shortcut, such as peaking, underscan and checkfield. Use the Dial to select and adjust the value among of sharpness, saturation, tint and volume, etc.

EXIT ☼: Single press to activate mute function under non menu mode; Single press to exit under menu mode.

75mm VESA and hot shoe mounts to fix Q7 pro on the top of camera or camcorder.

SPECIFICATIONS | ACCESSORIES

DISPLAY	Display Screen	7" IPS
	Physical Resolution	1920×1200
	Aspect Ratio	16:10
	Brightness	500cd/m²
	Contrast	1000:1
	Viewing Angle	170°/170°(H/V)
INPUT	HDMI	1
	3G-SDI	1
	USB (3D-LUT load)	1
OUTPUT	HDMI	1
	3G-SDI	1
AUDIO	Speaker	1
	Ear Phone Jack	1
POWER	Current	1A
	Input Voltage	DC 7-24V
	Battery Plate	F970
	Power Consumption	≤12W
ENVIRONMENT	Operating Temperature	-20℃~60℃
	Storage Temperature	-30℃~70℃
DIMENSION	Dimension (L/H/D)	182×124×22mm
	Weight	405g

Note: Due to constant effort to improve products and product features, specifications may change without notice.

ZHANGZHOU LILLIPUT ELECTRONIC TECHNOLOGY CO., LTD.
A02 / Song Di Road, Lan Tian Economic Development Zone, Zhang Zhou, Fu Jian, 363005, China
Tel: +86-596-2109661/2109323 Fax: +86-596-2109611 Email: sales@lilliput.com