



Compact
photo printer

P525L



Expand Business with Versatility

- New photo paper formula without toluene, high quality, low ownership cost, and eco-friendly
- Ideal for photo booth, photo kiosk, and on-location event photography
- Optional WiFi dongle uses phone link Prinbiz APP for print.
- Optional WiFi dongle uses the laptop to wireless transmission print.
- Stand-by time power 8W
- Easily identify the amount consumed by media with LCD.



Support
Wireless Printing



Support Memory
Card Printing



Laptops



Tablets/iPads®



Smartphones/
iPhones®

■ Specifications

Model Name	P525L		
Print Method	Dye Sublimation		
Resolution	300dpi (Dye sub 300dpi) ≡ Inkjet printing 4800dpi)		
Printable Size & Corresponding Print Kit	1.33x6" (34x152 mm) 2x6" (51x152 mm) 4x6" (102x152 mm)	4x6" (102x152 mm) Print Kit	
	3.5x5" (89x127 mm) 5x5" (127x127 mm) 5x7" (127x178 mm)	5x7" (127x178 mm) Print Kit	
	4x6" (102x152 mm) 5x6" (127x152 mm) 6x6" (152x152 mm) 6x8" (152x203 mm)	6x8" (152x203 mm) Print Kit	
	1.33x3" (34x76 mm) 2x3" (51x76 mm) 3x4" (76x102 mm)	4x6" (102x152 mm) Perforated Print Kit	
	3x4" (76x102 mm) 3x5" (76x127 mm) 3x6" (76x152 mm) 3x8" (76x203 mm)	6x8" (152x203 mm) Perforated Print Kit	
Prints Per Roll	4x6" (102x152 mm) : 500 prints (2 rolls/ctn) 5x7" (127x177 mm) : 290 prints (2 rolls/ctn) 6x8" (152x203 mm) : 250 prints (2 rolls/ctn)		
Print Speed	4x6" (12.8 sec) 5x7" (18.5 sec) 6x8" (20.5 sec)		
Surface Finishing	Glossy (Default), Matte		
Display	LCM with multi-language supported		
Operation System	Windows 7 or above, macOS v.10.6 or above		
Way to Print	PC link, WiFi, Memory card, NFC		
Support APP	Prinbiz App*		
Interface	USB 2.0		
Power	AC100-240V, 50-60Hz		
Dimension (WxHxD)	12.87x11.81x14.1 inch / 327x300x359 mm		
Weight	Approx. 18kg / 39.65lbs (Consumables excluded)		
Certification	FCC, CE, CCC, NCC, cTUVus		
Optional Accessories	Wireless USB dongle***, Output paper tray		

Specifications are subject to change without prior notice.

* Prinbiz APP downloadable from App Store & Google Play.

** Wireless USB dongle required (wireless printing supports Ad-hoc mode only).

■ Dimension



■ Service & Support Centers

Taiwan (Headquarters)

HiTi Digital, Inc.
9F., No.225, Sec. 3, Beixin Rd., Xindian Dist.,
New Taipei City 231, Taiwan (R.O.C.)
TEL: +886-2-2912-6268
FAX: +886-2-2912-6118
www.hiti.com

China

HiTi Digital Suzhou, Inc.
Room 1914, No. 381, Suzhou Ave. East,
Suzhou Industrial Park, Suzhou City,
Jiangsu Province China.
TEL: +86-512-82281688-2195
FAX: +86-512-82281690

North America

HiTi Digital America, Inc.
675 Brea Canyon Rd., Suite 7 Walnut, CA 91789, U.S.A.
TEL: +1-844-319-0099, +1-909-594-0099
FAX: +1-909-598-0011

Latin America

HiTi Digital, Inc. Oficina de Enlace en México
Pilares 506 Col. Del Valle Del. Benito Juárez CDMX
03100 MÉXICO
TEL: +52 (55) 7587-4057 , +52 (55) 7587-4058 ,
+52 (55) 7587-4059 , +52 (55) 7587-4060
FAX: +1-925-2622375

■ Flexible Connection

1. Wireless Printing

Directly data transferring: Download the "Prinbiz" APP for use with iOS and Android firstly, and send photos from hand-held devices to print.




Install the driver on a laptop with a wireless network card to wireless printing.



2. Memory Card Printing

Memory card browsing: Get prepared a carder reader which is capable of USB A-type slot for "Prinbiz WiFi dongle", after a few simple setup processes, users are able to browse the photos in memory card via hand-held devices to print.

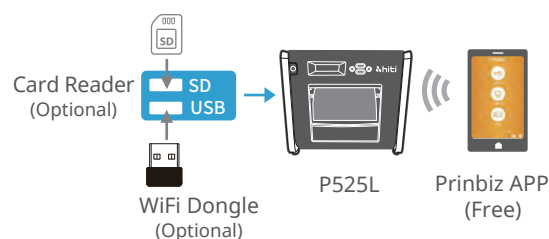

3. Smart Editing APP



Prinbiz APP



Europe

HiTi Digital Europe S.r.l.
Via Walter Marcobi 4, 21100 Varese, Italy
TEL: +39 332 176 5314 / 332 176 5312 (Technical Support)
FAX: +39 332 176 5315

Singapore

HiTi Digital Singapore Pte Ltd
No. 237 Alexandra Road, #05-14, The Alexcior Singapore 159929.
TEL: +65-6475-1885 / FAX: +65-6475-2281



Copyright ©2019 HiTi Digital, Inc. All Rights Reserved.
iPhone, iPad, macOS and App Store are trademarks of Apple Inc.
iOS is a trademark of Cisco. Android and Google Play are trademarks of Google Inc.
All other trade names and trademarks are properties of their respective owners.